


**ALU-PRO**  
ALUMINIUM PROFILES

**ROLLTECH**<sup>®</sup>  
ROLLTECH A/S - an Alu-Pro Group Company





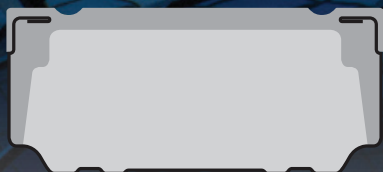





## CHROMATECH ultra S<sup>®</sup>




- Even more stability - easier handling in production
- Easy cutting and bending - fast and efficient production
- Plastic covers top of side flanges - no shiny part visible
- Easier sealant application - high productivity and quality
- No memory effect - keeps the shape
- 3,000 H UV-test (ISO 4892), 80° Fogging Test (IFT VE-07-2)
- EN 1279 with PS, PU, SI. CEKAL certified
- 6 colors, 12 sizes from 8 to 26 mm

**Stronger Hybrid Warm Edge spacer  
for the most demanding applications**

## Sizes and colours

Type	Width	Colours
8	7.5 mm	CHROMATECH ultra S® can be supplied in:  black  light grey  window grey  clay brown  mahogany brown  white 
10	9.5 mm	
12	11.5 mm	
13	12.5 mm	
14	13.5 mm	
15	14.5 mm	
16	15.5 mm	
18	17.5 mm	
20	19.5 mm	
22	21.5 mm	
24	23.5 mm	
26	25.5 mm	
Height 6.85 mm		

## Accessories

Connector:   Nylon      Steel
Corner:  Nylon  Other accessories as flexible corners etc. are also available

## Thermal data

Frame	Double IG-unit: 4/16/4 with $U_g = 1.1 \text{ W/m}^2\text{K}$ $\Psi$ values in $\text{W/mK}$	Triple IG-unit: 4/12/4/12/4 with $U_g = 0.7 \text{ W/m}^2\text{K}$ $\Psi$ values in $\text{W/mK}$
Aluminium	0.050	0.046
Wood/Aluminium	0.045	0.043
Wood	0.041	0.040
PVC	0.040	0.038

ift Report No. 17-003733-PR03



**ALU-PRO**  
ALUMINIUM PROFILES

+39 041 589 731  
 @ alupro@alupro.it  
 www.alupro.it

**ROLLTECH**  
 ROLLTECH A/S - an Alu-Pro Group Company

+45 96 23 33 43  
 @ sales@rolltech.dk  
 www.rolltech.dk